


## ■ WASHER-LINKED WIPER WITH DRIP-PREVENTIVE FUNCTION

- When the wiper control switch is OFF, INT (models without raindrop sensing function) or AUTO (models with raindrop sensing function) and the washer switch is turned on for approximately 0.2 seconds or more, the wiper starts a low operation at the same time as the washer fluid is ejected.
- The wiper operates three times in low operation after the washer switch is turned off.
- As shown in the following diagram, after the end of this operation, the wiper operates once more. It does so after an interval time determined by the vehicle speed, so that any washer fluid drips are wiped away.

### ► Timing Chart ◀

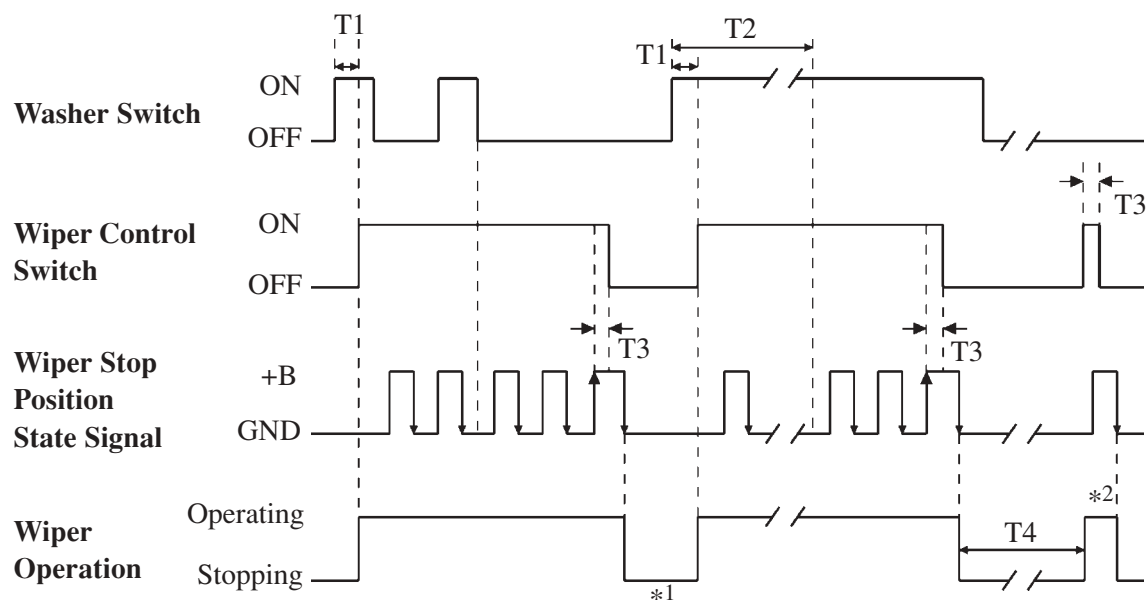

285BE38

T1: Approx. 0.2 sec.

T2: Approx. 40 sec.

T3: Approx. 0.5 sec.

T4: Refer to the interval time table

\*1: Washer-linked Operation

\*2: Drip-prevention Operation

### ► Interval Time Table ◀

Vehicle Speed	km/h (mph)	Interval Time
0 to 59	(0 to 36.7)	Approx. 3 sec.
60 to 79	(37.3 to 49.1)	Approx. 5 sec.
80 to 119	(49.7 to 73.9)	Approx. 7 sec.
120 to 159	(74.6 to 98.8)	Approx. 5 sec.
160 to 169	(99.4 to 105)	Approx. 3 sec.
170 or more	(105.6 or more)	No operation