


■ CONSTRUCTION


1. General

- A side-to-side split transfer case made of aluminum is used to realize a compact and lightweight construction.
- A unit ball bearing is used for supporting the driven pinion gear to realize a compact and lightweight construction.
- The ring gear and the ring gear mount case are joined with splines to realize a compact construction.

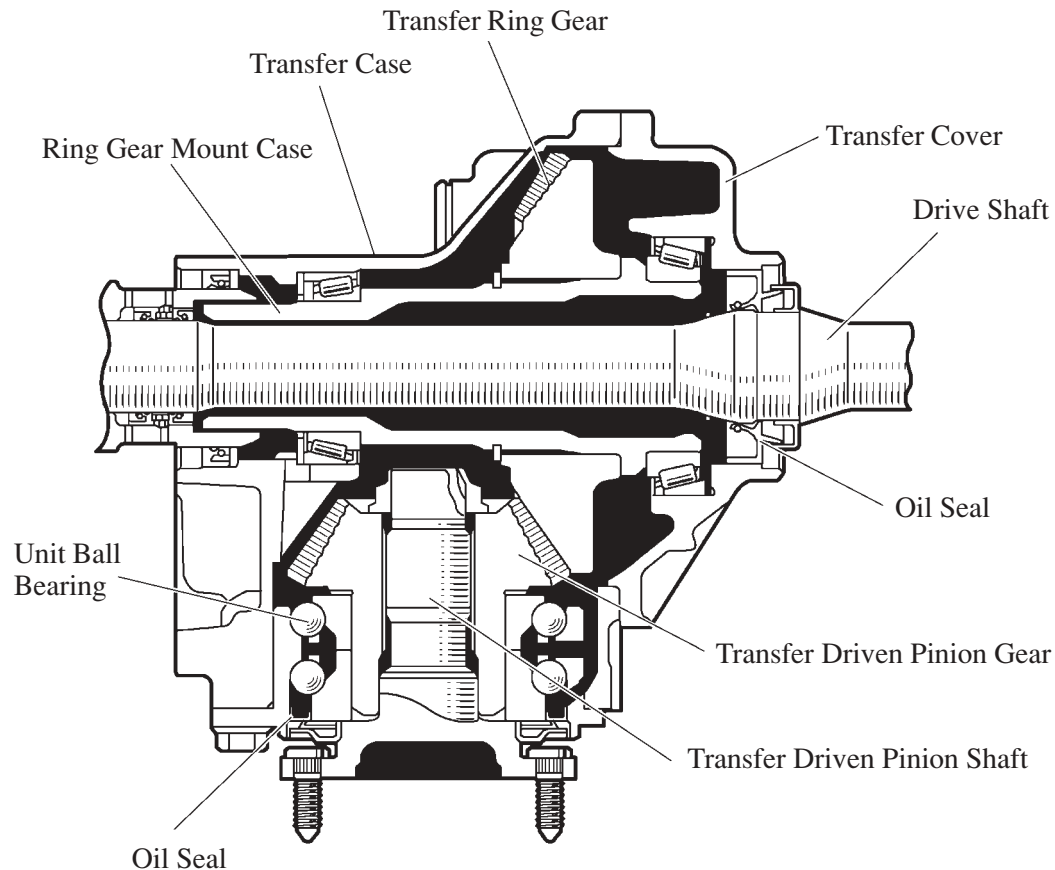


2. Transfer Power Flow

The illustration below shows the flow of power transmitted from the transaxle.

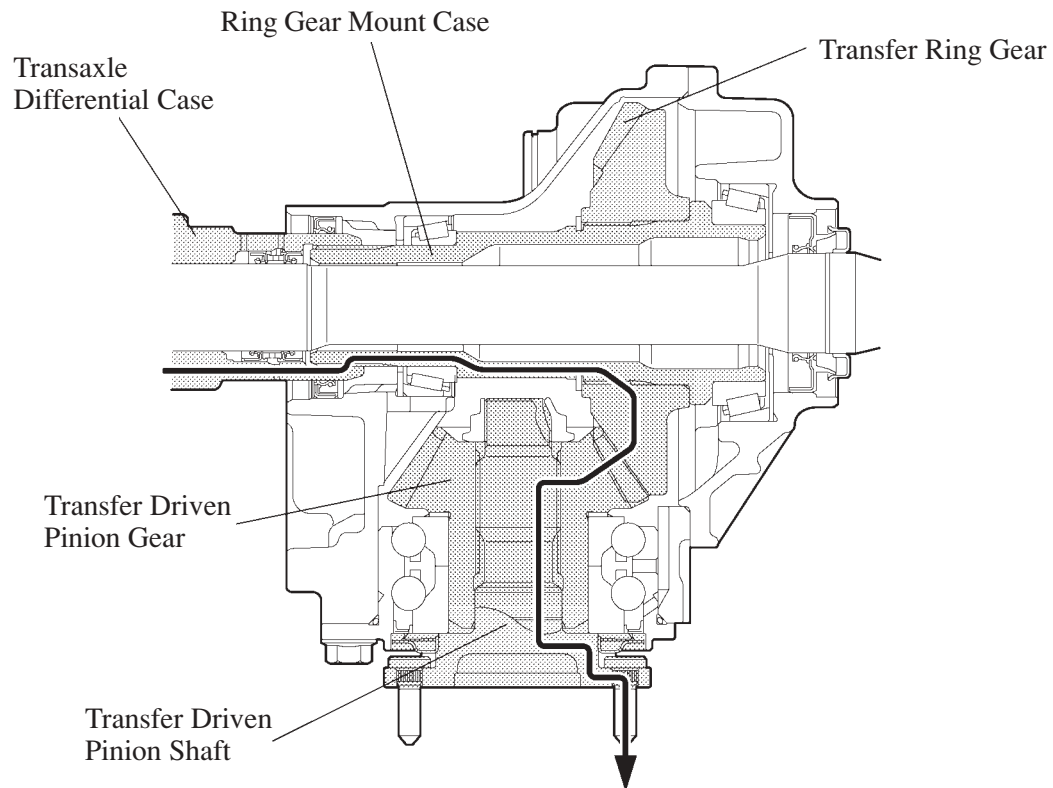

01NCH18Y

CH

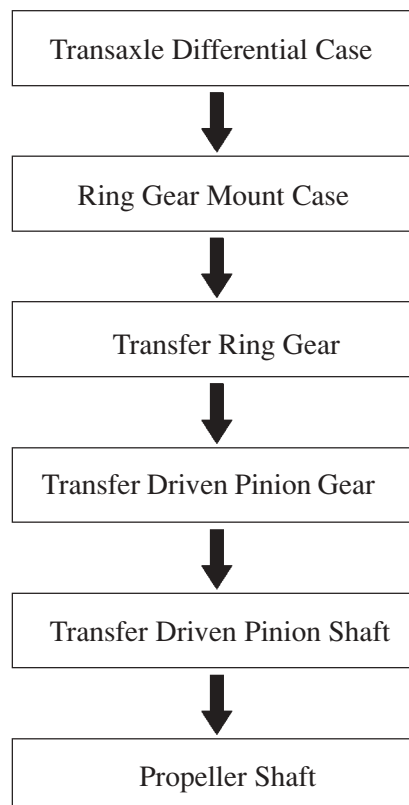

01NCH19Y