

FEATURES:

Fast, simple installation

Lower failure risk than module-level optimizers

NEC 2017 rapid shutdown compliant with SnapRS™



PV Link™


2500W MPPT Substring Optimizer

Model: APKE00010 Certification Model Reference: S2502

PV Link is the simple solar optimizer for quick installation and long-lasting performance. Connect as few as two or as many as nine PV modules to each PV Link to overcome shading and challenging roof lines.

ADDITIONAL FEATURES

- Quick connections with MC4 connectors
- 2500W capacity
- Compatible with high-voltage smart batteries
- Cost-effective solution for high-performance PV
- Ground-fault protection

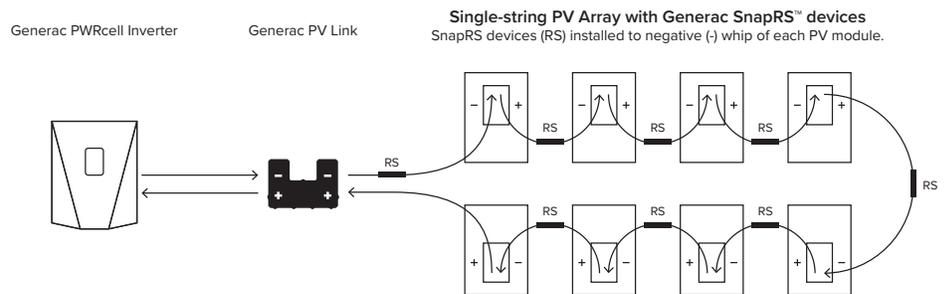

GENERAC®

Generac Power Systems, Inc.
S45 W29290 Hwy. 59, Waukesha, WI 53189
www.Generac.com 1-888-GENERAC (1-888-436-3722)

Specifications



PWRCELL PV LINK (APKE00010)

| | | | |
|---------------------------------|------------------------|--------------------|---|
| RATED POWER | 2500 W | PROTECTIONS | Ground-fault, Arc-fault (Arc-fault Type 1 AFCI, Integrated) |
| PEAK EFFICIENCY | 99% | MAX OPERATING TEMP | 70 °C |
| MPPT VOLTAGE RANGE | 60-360 VMP | SYSTEM MONITORING | PWRview Web Portal and Mobile App |
| MAX INPUT VOLTAGE | 420 VOC; max when cold | ENCLOSURE | Type 3R |
| MAX OUTPUT | 420 VOC | WEIGHT | 7.3 lb |
| NOMINAL OUTPUT (REBUS™) | 380 VDC | DIMENSIONS (L,W,H) | 2" x 15.4" x 9.6" |
| MAX OUTPUT CURRENT | 8 A | COMPLIANCE | UL 1741, CSA 22.2 |
| MAX SHORT CIRCUIT CURRENT (ISC) | 18 A | WARRANTY | 25 Years |
| STANDBY POWER | <1 W | | |

Specifications subject to change without notice.