

# AIONRISE

Generate | Store | Utilise

## PHOTOVOLTAIC MODULE

ALL BLACK PERC

AION60G1 **330 Wp**

### MADE IN GEORGIA

AIONRISE PV modules are manufactured only in-house at the own fully automated facilities with an integrated uncompromising multi-step quality check using the latest available technology.

### REDUCING LCOE

Compounded by the European bill of materials AIONRISE products deliver long-term higher output comparing to other analogs and provide lower LCOE.

### CERTIFIED QUALITY

AIONRISE is certified by all key quality programs of TUV Rhineland, which considerably expand tests of IEC 61215 / 61730 / 62716 / 61701 and UL 61730 with Regular Production Surveillance performed every six months. Extensive participation in the testing programs of the global independent certification authority ensures the high reliability, safety, and quality of our modules.



POSITIVE POWER TOLERANCE



MICRO-CRACK FREE



PID RESISTANT



SALT CORROSION RESISTANT



SAND RESISTANT



HIGHLY STABLE AND TOUGH




AMMONIA RESISTANT

## 25 YEARS

## EXTENDED WARRANTY

TERMS AND CONDITIONS APPLY

### GUARANTEED MODULE PERFORMANCE

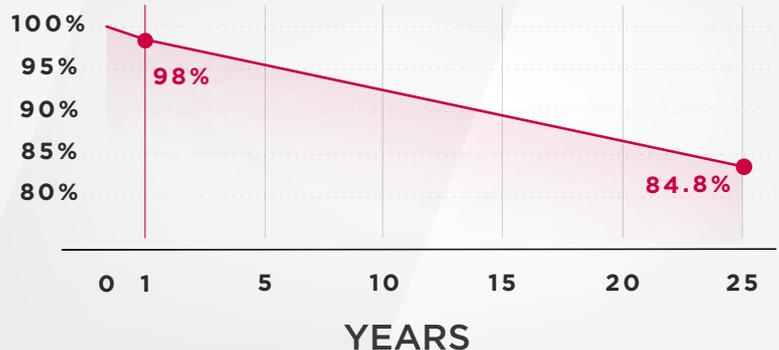

## MADE IN GEORGIA

All rights reserved. Specifications included in this data sheet are subject to change without notice. ARDS-22V06 US

# AIONRISE

## MATERIAL CHARACTERISTICS

Dimensions	65.8 x 39.5 x 1.4 in / 1671 x 1002 x 35 mm
Weight	40.35 lb / 18.3 kg
Number of cells	60 pcs (6 x 10)
Cells type	Mono-crystalline
Cells size	158.75 x 158.75 mm, G1
Glass	3.2 mm double layer, AR coated, Iron free
Backsheet	Black, 315 µm
Junction box	IP 67 rated, 3 bypass diodes
Output cable	4 mm <sup>2</sup> , 3.28 ft
Connector	Staubli MC4 / MC4-Evo 2


## PACKAGING INFORMATION

One pallet quantity	30 pcs
Pallet size	67.3 x 43.7 x 44.9 in / 1710 x 1110 x 1140 mm
Pallet weight	1294 lb / 587 kg
Double pallet quantity	60 pcs + 4 pcs
Double pallet size	67.3 x 43.7 x 97.6 in / 1710 x 1110 x 2480 mm
Double pallet weight	2760 lb / 1252 kg

## LOADING INFORMATION

20 ft HC / HQ Container	384 pcs maximum
40 ft HC / HQ Container	896 pcs maximum
Truck	952 pcs maximum

## DIMENSIONS

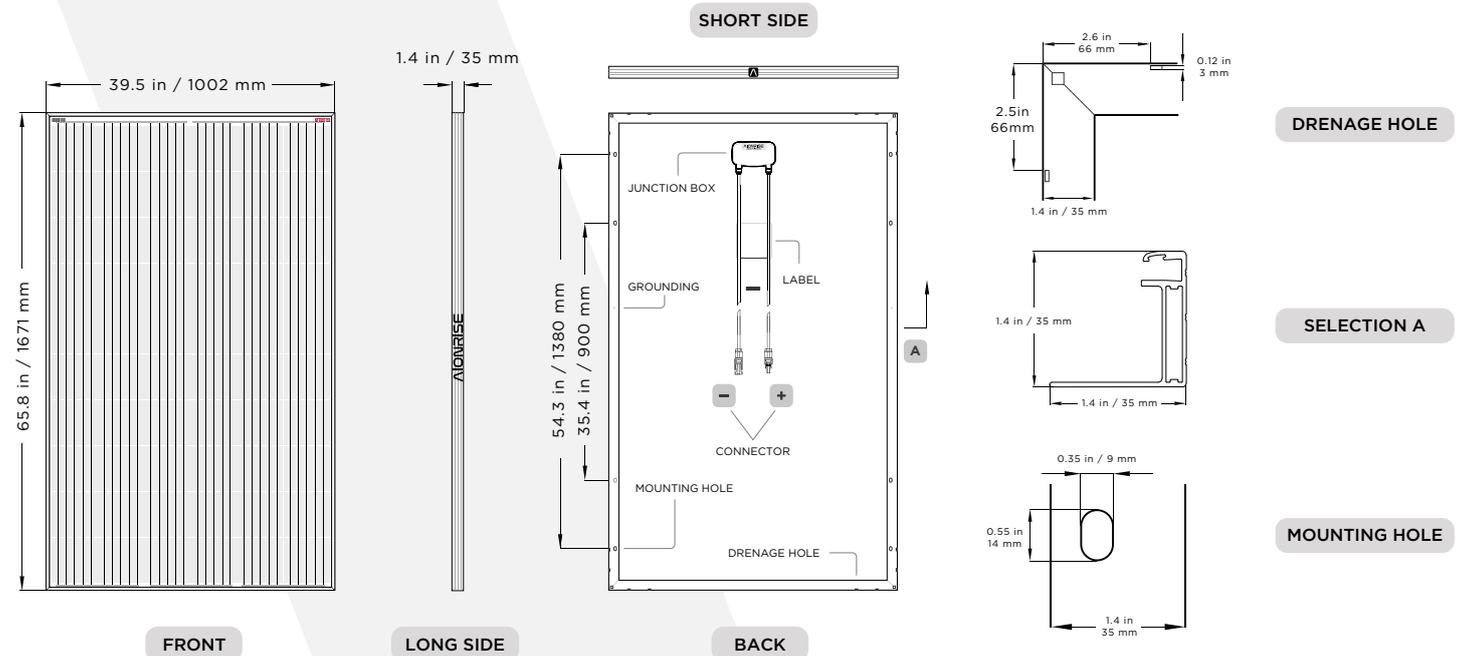

## ELECTRICAL CHARACTERISTICS

### AION60G1-330

Nominal maximum power	P <sub>max</sub> (Wp)	330
Maximum power voltage	V <sub>mp</sub> (V)	33.81
Maximum power current	I <sub>mp</sub> (A)	9.76
Open-circuit voltage	V <sub>oc</sub> (V)	41.31
Short-circuit current	I <sub>sc</sub> (A)	10.37
Module efficiency	(%)	19.90
Power tolerance	P <sub>max</sub> (Wp)	0 / +5
Maximum system voltage DC	(V)	1000 / 1500
Maximum system fuse rating	(A)	20
Operating temperature		-40°C (-40°F) to +85°C (+185°F)
Temperature coefficients of P <sub>max</sub>	(% / °C)	-0.36
Temperature coefficients of V <sub>oc</sub>	(% / °C)	-0.29
Temperature coefficients of I <sub>sc</sub>	(% / °C)	0.048
Normal operating cell temperature (NOCT)	(°C)	45 ± 2

The electrical data apply to standard test conditions (STC):  
Irradiance of 1000 W/m<sup>2</sup> with spectrum AM 1.5 and a cell temperature of 25°C

## MAXIMUM LOAD\*

Uplift load (wind)	5400 Pa (210 mph)
Downforce load (snow)	5400 Pa

\*For more information please refer to Instruction Manual

## CERTIFICATES



## CONTACT INFORMATION

### AIONRISE Holding Inc.

651 N Broad St, Middletown, DE 19709, USA

Manufacturing:

### AIONRISE LLC

88 Avtomshenebeli St, 4600 Kutaisi, Georgia

1 888 885 AION (toll free)

info@aionrise.com | www.aionrise.com

# MADE IN GEORGIA