

# AIONRISE

Generate | Store | Utilise

## PHOTOVOLTAIC MODULE

ALL BLACK PERC

AION72G1 395 Wp

### MADE IN GEORGIA

AIONRISE PV modules are manufactured only in-house at the own fully automated facilities with an integrated uncompromising multi-step quality check using the latest available technology.

### REDUCING LCOE

Compounded by the European bill of materials AIONRISE products deliver long-term higher output comparing to other analogs and provide lower LCOE.

### CERTIFIED QUALITY

AIONRISE is certified by all key quality programs of TUV Rhineland, which considerably expand tests of IEC 61215 / 61730 / 62716 / 61701 and UL 61730 with Regular Production Surveillance performed every six months. Extensive participation in the testing programs of the global independent certification authority ensures the high reliability, safety, and quality of our modules.



POSITIVE POWER TOLERANCE



MICRO-CRACK FREE



PID RESISTANT



SALT CORROSION RESISTANT



SAND RESISTANT



HIGHLY STABLE AND TOUGH




AMMONIA RESISTANT

## 25 YEARS

## EXTENDED WARRANTY

TERMS AND CONDITIONS APPLY

### GUARANTEED MODULE PERFORMANCE

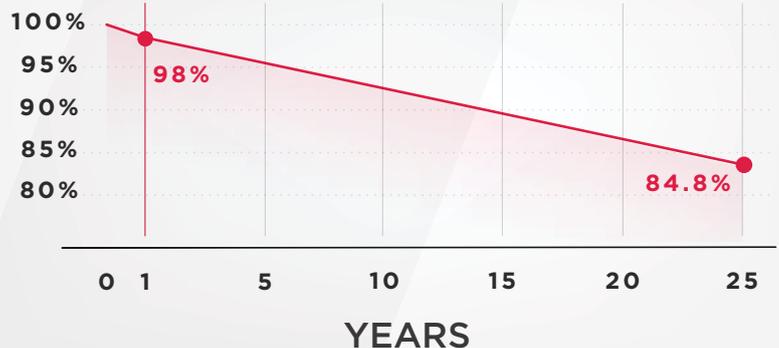

## MADE IN GEORGIA

All rights reserved. Specifications included in this data sheet are subject to change without notice. ARDS-22V06 US

# AIONRISE

## MATERIAL CHARACTERISTICS

Dimensions	77.9 x 39.5 x 1.6 in / 1979 x 1002 x 40 mm
Weight	51.37 lb / 23.3 kg
Number of cells	72 pcs (6 x 12)
Cells type	Mono-crystalline
Cells size	158.75 x 158.75 mm, G1
Glass	3.2 mm double layer, AR coated, Iron free
Backsheet	Black, 310 µm
Junction box	IP 67 rated, 3 bypass diodes
Output cable	4.0 mm <sup>2</sup> , 3.94 ft
Connector	Staubli MC4 / MC4-Evo 2

## PACKAGING INFORMATION

One pallet quantity	26 pcs
Pallet size	79.45 x 43.1 x 44.3 in / 2018 x 1095 x 1125 mm
Pallet weight	1400 lb / 635 kg
Double pallet quantity	52 pcs + 4 pcs
Double pallet size	79.45 x 43.1 x 96.5 in / 2018 x 1095 x 2450 mm
Double pallet weight	3009.3 lb / 1365 kg

## LOADING INFORMATION

20 ft HC / HQ Container	280 pcs maximum
40 ft HC / HQ Container	616 pcs maximum
Truck	780 pcs maximum

## ELECTRICAL CHARACTERISTICS

**AION72G1-395**

Nominal maximum power	Pmax (Wp)	395
Maximum power voltage	Vmp (V)	39.32
Maximum power current	Imp (A)	10.05
Open-circuit voltage	Voc (V)	48.17
Short-circuit current	Isc (A)	10.58
Module efficiency	(%)	19.9
Power tolerance	Pmax (Wp)	0 / +5
Maximum system voltage DC	(V)	1000 / 1500
Maximum system fuse rating	(A)	20
Operating temperature	(°C)	-40°C (-40°F) to +85°C (+185°F)
Temperature coefficients of Pmax	(% / °C)	-0.36
Temperature coefficients of Voc	(% / °C)	-0.29
Temperature coefficients of Isc	(% / °C)	0.048
Normal operating cell temperature (NOCT)	(°C)	45 ± 2


The electrical data apply to standard test conditions (STC):  
Irradiance of 1000 W/m<sup>2</sup> with spectrum AM 1.5 and a cell temperature of 25°C

## MAXIMUM LOAD\*

Uplift load (wind)	5400 Pa (210 mph)
Downforce load (snow)	5400 Pa

\*For more information please refer to Instruction Manual

## DIMENSIONS

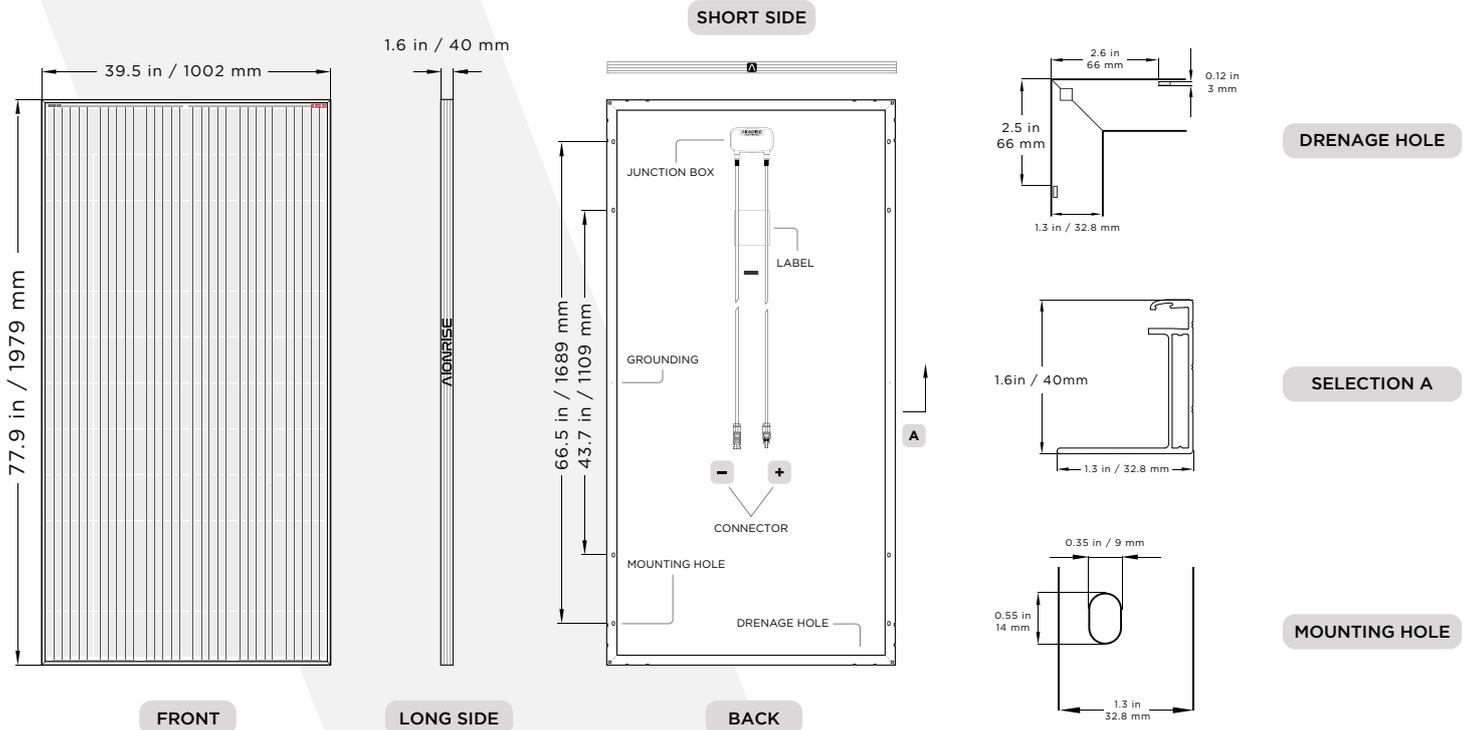

## CERTIFICATES



## CONTACT INFORMATION

### AIONRISE Holding Inc.

651 N Broad St, Middletown, DE 19709, USA

Manufacturing:

### AIONRISE LLC

88 Avtomshenebeli St, 4600 Kutaisi, Georgia

1 888 885 AION (toll free)

info@aionrise.com | www.aionrise.com

**MADE IN GEORGIA**